
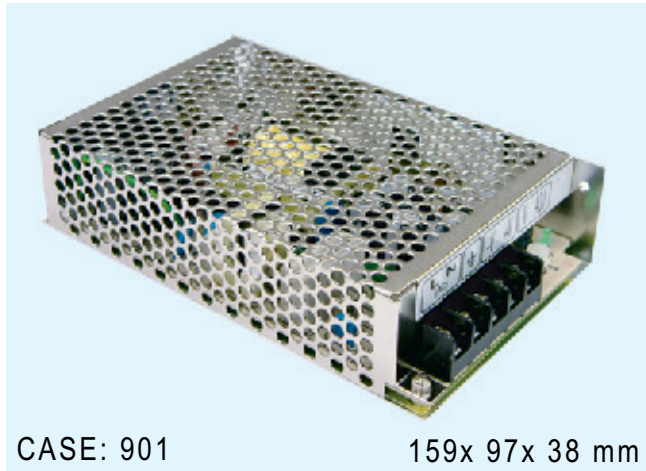


60W Single Output Switching Power Supply



- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Fixed switching frequency at 50KHz
- Approvals: UL / CUL / TUV / CB / CE
- Cooling by free air convection
- 100% full load burn-in test
- 2 years warranty

| | |
|---------------------------|--|
| AC input voltage range | 85~264VAC; 120~370VDC |
| AC inrush current | Cold start, 20A at 115VAC, 40A at 230VAC |
| DC adjustment range | ±10% rated output voltage |
| Overload protection | 105%~150% hiccup mode, auto-recovery |
| Over voltage protection | 115%~135% rated output voltage |
| Setup, rise, hold up time | 300ms, 50ms, 90ms at full load and 230VAC |
| Withstand voltage | I/P-O/P:3.0KVAC, I/P-FG:1.5KVAC, 1minute |
| Working temperature | 0~45°C@100%, -10°C@80%, 60°C@60% load |
| Safety standards | UL1012, UL60950-1, TUV EN60950-1 approved |
| EMC standards | EN55022 class B, EN61000-3-2,3 EN61000-4-2,3,4,5,6,8,11, ENV50204 |
| Connection | 5P/ 9.5mm pitch terminal block |
| Packing | 0.51kg ; 24pcs / 13.1kg / 0.70CUFT |

| Stock No. | Model No. | Output | Tol. | R&N | Effi. |
|-----------|-----------|-------------|------|-------|-------|
| 10051 | S-60-5 | 5V, 0~12A | ±2% | 120mV | 73% |
| 10052 | S-60-12 | 12V, 0~5.0A | ±1% | 120mV | 76% |
| 10053 | S-60-15 | 15V, 0~4.0A | ±1% | 150mV | 77% |
| 10054 | S-60-24 | 24V, 0~2.5A | ±1% | 150mV | 79% |

Available at www.thePowerStore.co.uk